


# Current Sensor – Current Shunt

The type HA has an insulating base and can be mounted on conductive surfaces. Available in ranges of 0.5 amp through 600 amps with a 50Mv output and 1 amp through 600 amps with a 100Mv output, the HA is designed for power cable hook-up utilizing the 3/8-16 screws. Due to fragile nature of the resistance element the lower amperage shunts come with a protective cover. This popular design is available without the insulating base if desired.

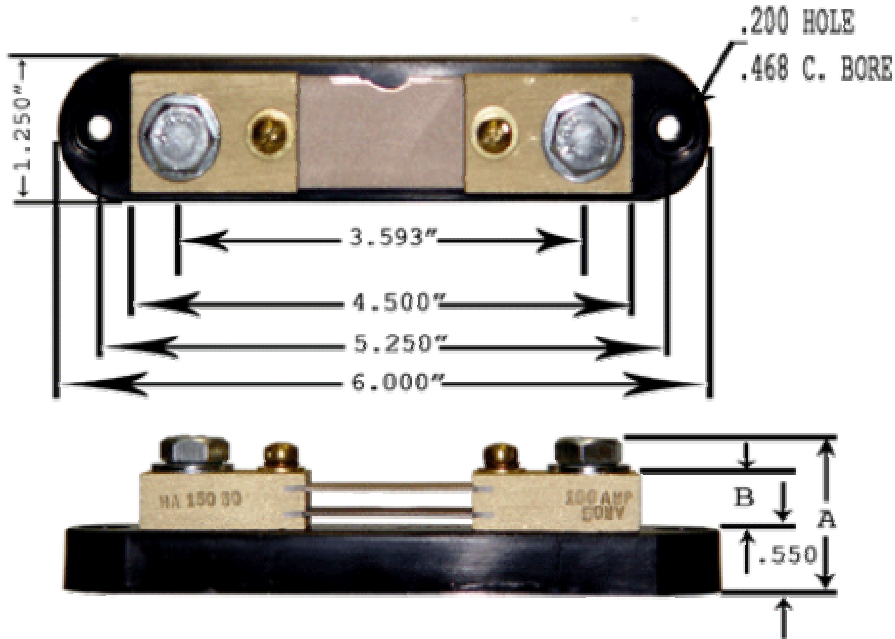

| HA-10-50<br>10 Amp 50 Mv Shunt | HA-20-50<br>20 Amp 50 Mv Shunt |
|--------------------------------|--------------------------------|
| Amps: 10                       | Amps: 20                       |
| MV: 50                         | MV: 50                         |
| Ohms: 0.005                    | Ohms: 0.0025                   |
| A: 1.380                       | A: 1.380                       |
| B: 0.500                       | B: 0.500                       |

## Contact Us

Phone: 317-823-4478

Fax: 317-823-4835

©2004 Empro Mfg. Co., Inc.

<http://www.emproshunts.com/>